

PM 0093 User manual

Serial port communication Parameters:

Baud Rate: 9600

Data Bits: 8


Parity: None

Stop Bits: 1.0

Termination Char: \n

Schematic diagram of channels and switches:

PM0093 has 16 differential channels, and 22 switches are used for channel switching. The distribution of channels and switches is shown in the figure below

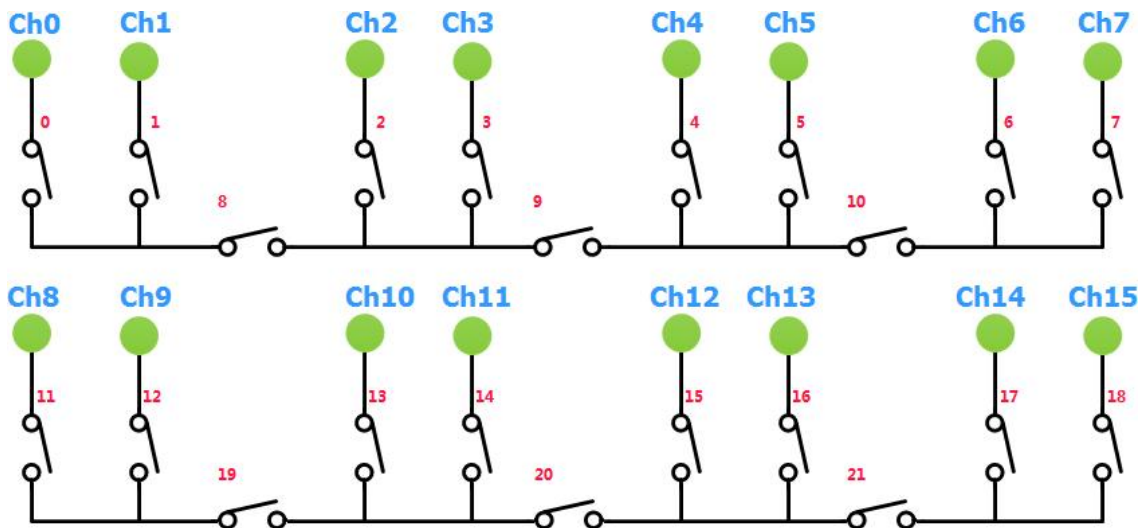

Control instruction:

The switch control instruction of PM0093 uses S as the instruction start, # as the end, and the state of 22 switches in the middle, 0 on, 1 off.

