

Pressure-field Microphone Sets M 673+A 802 Version: 2.0_20260605_EN



The M 673+A 802 is an IEPE 1/2 inch prepolarized pressure field measurement microphone. The main part is made of stainless steel so that it has good toughness and long-term stability.

The M 673+A 802 positioning is a cost-effective microphone. IEPE signal conditioner such as MegaSig PM 0083 is usually used to achieve the best test results.

Product characteristics


- Compliance with IEC 61094-4 WS2P Specifications for working standard microphones
- Wide dynamic range, wide frequency range
- Suitable for hard surface sound pressure measurement ,with acoustic coupling cavity for acoustic testing

Specifications

Sound field	Pressure-field
Polarization	0V (Pre polarized)
Frequency range	3.15Hz – 20kHz ± 2dB 12.5Hz – 10kHz ± 1dB
Dynamic range	26dB (A) -147dB (1000 Hz THD<3%)
Inherent noise	26dB (A)
Sensitivity mV/Pa(dBV/Pa)	12mV (-38 dB) ±2dB
Output level max	5.6V
Output impedance	<50Ω
Power supply min. to max.	2mA-20mA (Typical 4mA)
Microphone venting	Rear
Connect type	BNC



Temperature range,operation	-30°C to85°C
Storage condition	Temperature: 25°C±5°C, humidity: 50%±15%RH (to ensure the long-term stability of the sensor)
Relative humidity	0-90% no condensation
Relative humidity coefficient	<0.1dB(0-90% no condensation)

Pressure-field Measurement Sets M 673+A 802 Frequency Response

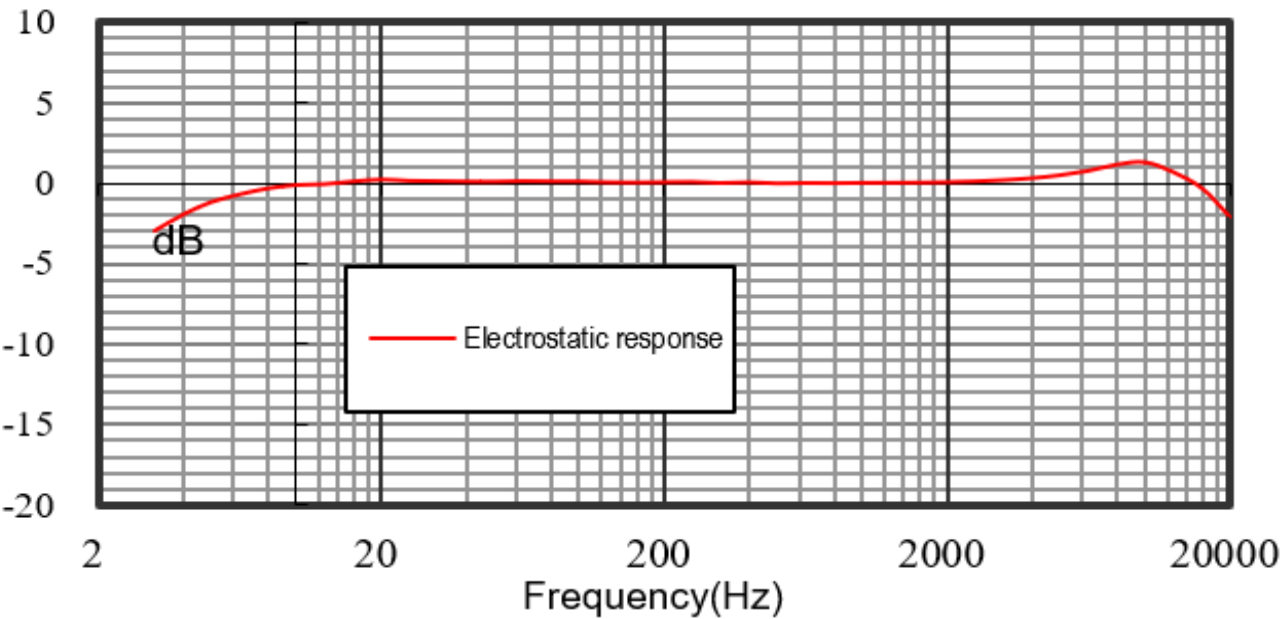

Mechanical dimension

Overall length	80.4mm (including protection grid)
Diameter	13.2mm (including protection gate)
Diameter	12.7mm(excluding protection gate)
Lead pole fit thread	11.7mm-60UNS

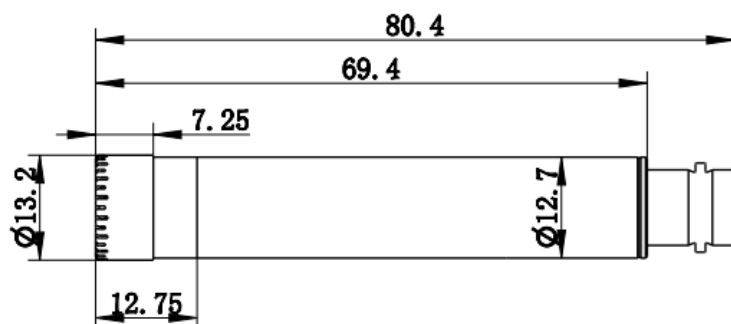

MegaSig reserves the right to change specifications and accessories without notice.



www.megasig.com

MegaSig Measurement & Control Technology Co.,Ltd

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: sale@megasig.com

Technical support email: support@megasig.com

Address: 4th & 5th floors, Unit 2, Building 1, Guangming Digital Smart Manufacturing Industrial Park, Jinmo Road, Guangming District, Shenzhen, China