

AB 69 自动声频射频屏蔽箱


产品规格书

V1.4_20250828_CN

最终版权所有 (c) 深圳市美格信测控技术有限公司

在无深圳市美格信测控技术有限公司优先书面授权书前提下，此出版物任何一个部分不可通过任何形式进行复制、修改和翻译。对于非法复制、修改和翻译商业行为，将根据国家知识产权相关法律追求其法律责任。
从此文件发布日期起，在此发表的是当前或者拟定的信息。由于我们会不断对产品进行改进和增加特征此出版物中的信息如有变动恕不另行通知。

产品简介

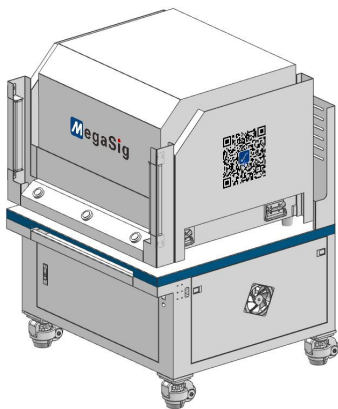

(AB 69柜子为选配件)

自动化声频射频屏蔽箱

AB 69是一款专门针对需要在较小空间实现较好声学 and 射频隔离环境的测试场合而设计的屏蔽箱，内腔较大，能有效阻止箱内反射与混响，为产品的音频测试提供一个稳定可靠的声学环境，同时外腔全钣金制造，保证了良好的电磁屏蔽。如很紧凑的研发场地，或消费类电子生产线，或汽车电子生产线.....

该产品声学方面采用独特压缩设计，在有限的壁厚上实现 5 层复杂隔音层，并采用隔音绒布作为表面层，解决了使过程中尖劈老化破损而带来的不稳定的问题，并在有限紧凑空间里实现优秀的声隔离，并且通道端子接口资源丰富，手动自动一体，能满足各类产品，各类产线的测试需求。

规格参数

整体参数	
屏蔽箱外尺寸 (不算柜子，气缸)	(W)530×(L)935×(H)675mm±5mm
屏蔽箱内尺寸	(W)410×(L)470×(H)395mm±5mm
整体尺寸 (屏蔽箱+柜子)	(W)900×(L)935×(H)1275mm±5mm
隔离度	声频：外界 80dBA，内部≤ 40dBA 射频：100M~ 6G，隔离≥ 60dB
工作电压	220V
BNC 接线端子数目	默认1 个端子(带6个BNC通道) 可定制增加
USB 接线端子数目	默认1 个端子(带2个USB通道) 可定制增加
3.5mm 接线端子数目	可定制
DC 接口	可定制
以太网口	可定制
开关类型	双气缸
程控	支持


功能特点

- 声频射频双隔离
- 支持手动、程控双模式操作
- 双气缸开关设计，配备防夹手安全机制
- 丰富的接入接出端子，支持可定制
- 内表面采用耐用微孔棉，避免传统海绵易破损问题

隔层结构

由外至内：


- 3mm 钢板喷塑
- 4 层 10mm 隔尼板
- 2 层 50mm 棉体
- 1mm 微孔棉表面



典型应用场景


应用场景	
消费类电子	- 蓝牙耳机音频测试 - ANC耳机音频测试 - 手机音频综测 - 单体电声音频测试
电机	- 基于电机产品的声品质测试 - 基于电机产品的阶次分析测试
汽车电子	- A2B车载音频总线功放测试 - A2B车载音频总线车机测试

声频隔离度曲线

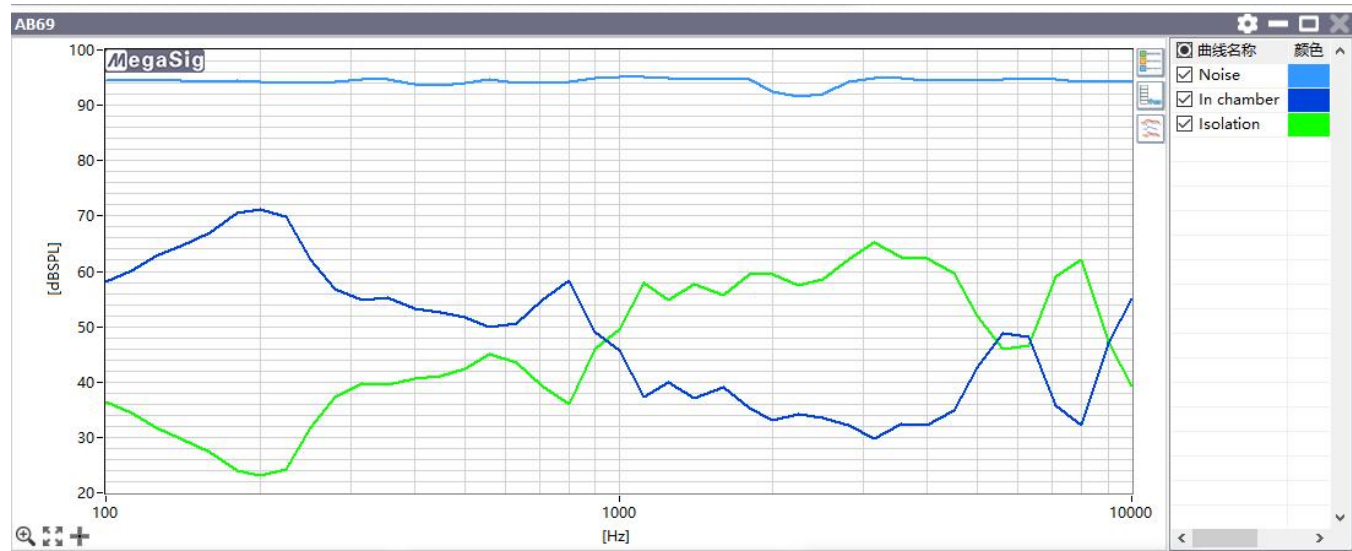


尺寸与结构

单位: mm

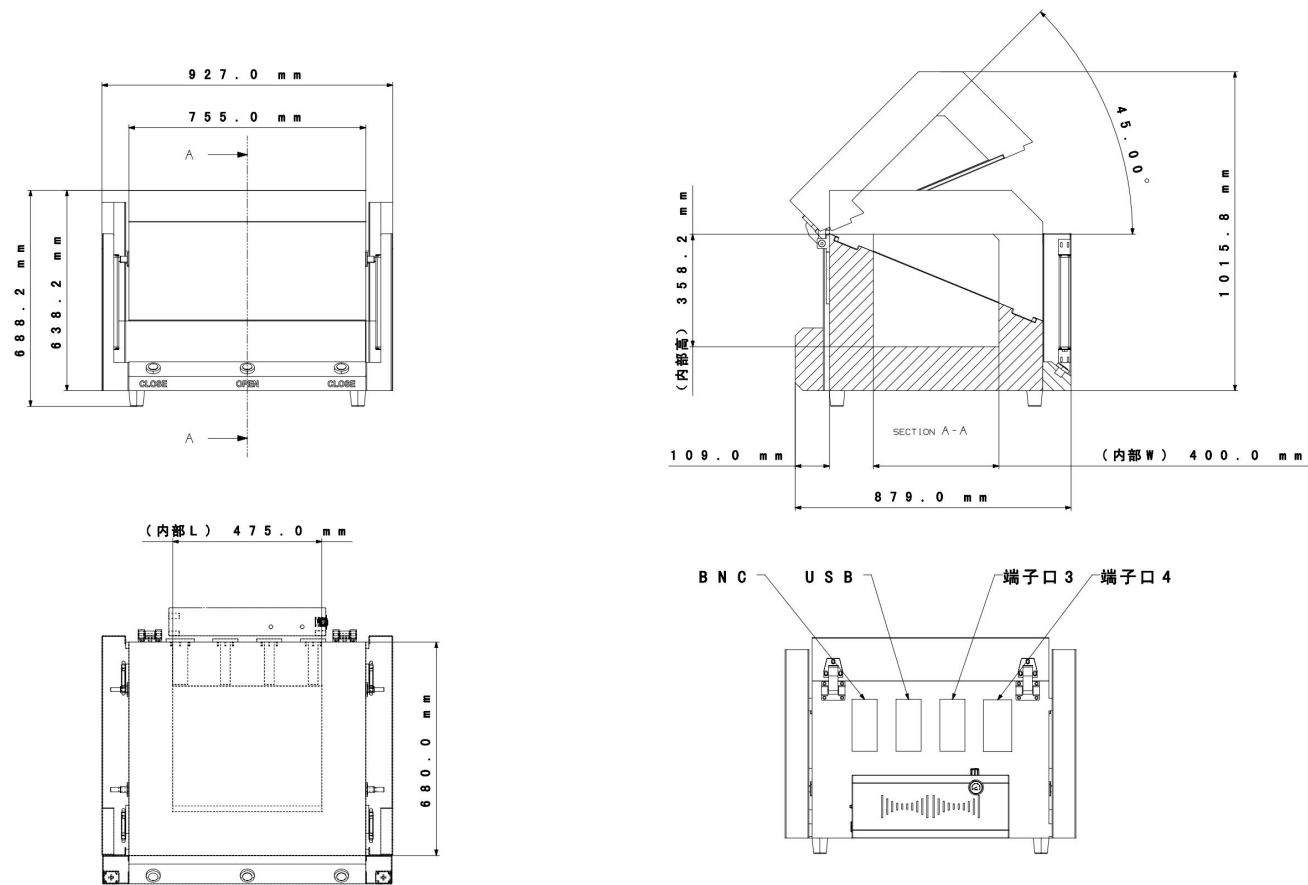

AB 69 箱体

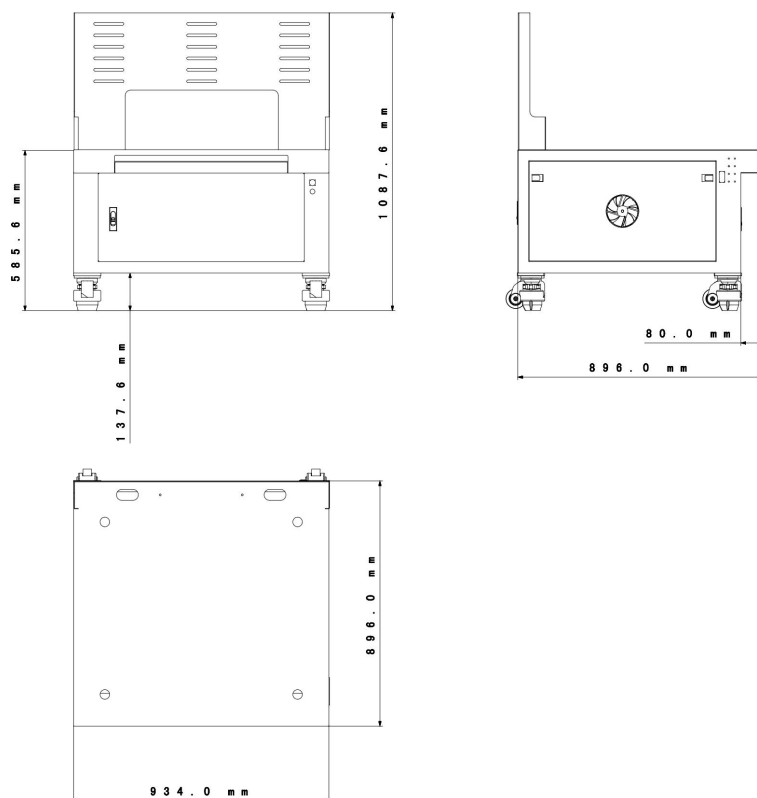

D 69 柜子

屏蔽性能测试



射频隔离度测试配置

测试设备:

- NI PXIe-5644R
- 2.4G 全向天线

测试步骤


- 连接设备, 将发射天线和接收天线通过RF电缆与NI设备对应的输入输出接口相连接。
- 通过固定器将接收天线垂直放置于屏蔽箱内部设定位置。
- 封闭屏蔽箱, 设置NI仪器输出2.441Ghz, -10dBm信号, 测量发射天线位于图中五个位置的信号幅值A。
- 根据测得信号幅值A与输出信号-10dBm的差值, 得出该屏蔽箱的隔离度 $SE=A+10$ 。

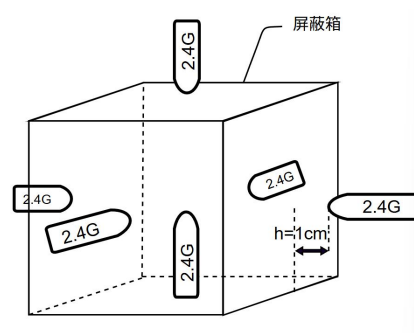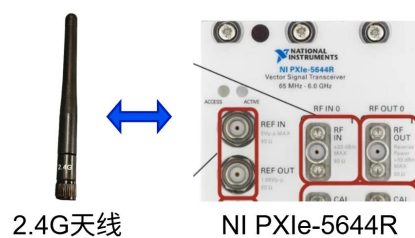

声频隔离度测试配置


测试设备：

- 音频分析仪：PM6181
- A声源：SB07
- 传声器：M663+A802

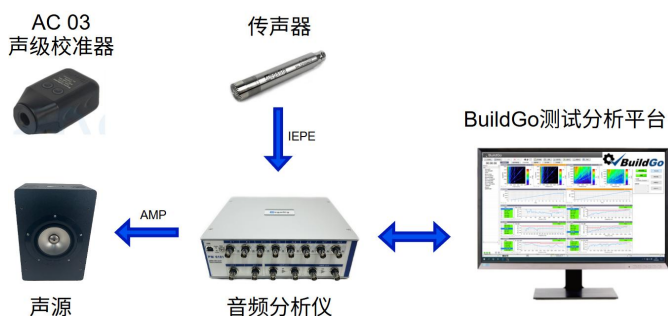

测试步骤

- AC 03声级校准器对传声器进行软件系数校准。
- 在未放置屏蔽箱的条件下，将传声器放置到测试的中心位置，测试声源围绕传声器布置，并连接相应设备。
- 打开测试声源，音频分析仪输出具有连续频谱的噪声信号，同时获取传声器采集的第一噪声样本数据。
- 将屏蔽箱放置中心位置，传声器放置屏蔽箱内设定位置，并封闭屏蔽箱；输出相同噪声信号，获取传声器采集屏蔽箱内的第二噪声样本数据。
- 根据第一噪声样本数据和第二噪声样本数据的差值，得到屏蔽箱的隔声量随频率变化曲线。

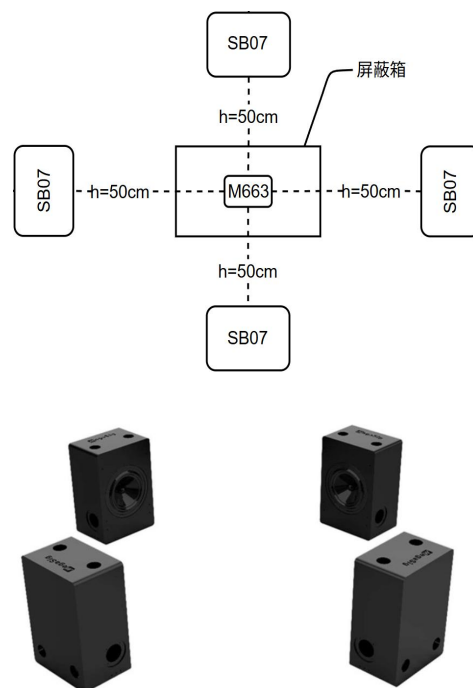

若产品指标更新，恕不另行通知。


www.megasig.com

深圳市美格信测控技术有限公司

电话：0755-8950.8393

传真：0755-8950.8392

销售邮箱：sale@megsig.com

技术支持：support@megsig.com

地址：中国.深圳.光明.红星创智广场1栋2单元1002室

AB 69 Automated audio and RF shielding box

Product DataSheet

V1.4_20250828_EN


Final copyright (c) Shenzhen MegaSig Measurement and Control Technology Co. Ltd

Without prior written authorization from Shenzhen Megasig Measurement and Control Technology Co, Ltd, no part of this publication may be copied, modified, or translated in any form. For illegal copying, modification, and translation of commercial activities, legal responsibility will be pursued in accordance with relevant national intellectual property laws. From the date of publication of this document, the information published here is current or proposed. **Due to our continuous improvement and addition of features to the product, the information in this publication is subject to change without prior notice.**

Product Introduction

Automated audio and RF shielding box

AB 69 is a shielding box designed specifically for testing scenarios that require good acoustic and RF isolation in a small space. With a large inner cavity, it can effectively prevent reflection and reverberation inside the box, providing a stable and reliable acoustic environment for product audio testing. At the same time, the outer cavity is made entirely of sheet metal, ensuring good electromagnetic shielding. Such as compact research and development sites, consumer electronics production lines, or automotive electronics production lines

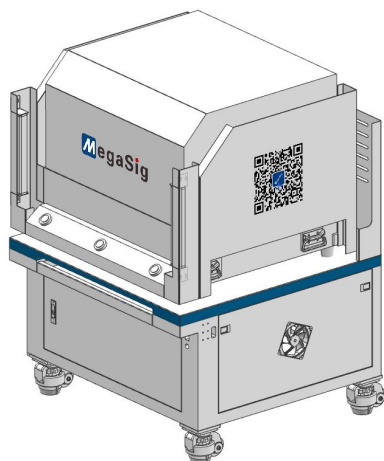

(Cabinets are optional accessories)

This product adopts a unique compression design in terms of acoustics, achieving 5 layers of complex sound insulation on a limited wall thickness, and using sound insulation velvet as the surface layer to solve the problem of instability caused by aging and damage of sharp edges during the process. It also achieves excellent sound isolation in a limited and compact space. The channel terminal interface resources are abundant, and manual and automatic integration can meet the testing needs of various products and production lines.

Specification parameters

Overall parameters	
Outer Dimensions of shielding box(Excluding cabinets and cylinders)	(W)550×(L)670×(H)580mm±5mm
Dimensions inside the shielding box	(W)410×(L)470×(H)395mm±5mm
Overall size (Shielding box+cabinet)	(W)730×(L)670×(H)1700mm±5mm
Isolation	Audio: Outside 85dBA, Internal≤ 48dBA RF: 100M ~ 6G , Isolation≥ 55dB
Working Voltage	220V
Number of BNC wiring terminals	Default 1 terminal (with 4 BNC channels) Customization to increase
Number of USB wiring terminals	Default 1 terminal (with 2 USB channels) Customization to increase
Number of 3.5mm wiring terminals	One(Support customization)
DC interface	One(Support customization)
RF interface	Six(Support customization)
Switch type	Dual Cylinder
Programmed control	Support

Features

- Audio RF dual isolation
- Support manual and programmable dual-mode operation
- Dual button design, anti pinch safety mechanism
- Rich access and output terminals, supporting customization
- Inside the box, there are three sets of air circuits
- The inner surface is made of durable microporous cotton to avoid the problem of traditional sponges being easily damaged

Barrier structure


From outside to inside:

- 3mm Steel plate spray coating
- 1 layer of 10mm RF absorbing cotton
- 1 layer of 10mm Glass fiber cotton
- 1mm Micro porous cotton surface

Typical application scenarios





Application scenarios		
consumer electronic	- Bluetooth Earphone Audio Test - Mobile audio comprehensive testing	- ANC headphone audio test - Single unit electroacoustic audio testing
electrical machinery	Sound quality testing based on motor	Order analysis testing based on motor
Automotive Electronics	A2B Car Audio Bus Amplifier Test	A2B Car Audio Bus Car Machine Test

Audio isolation curve

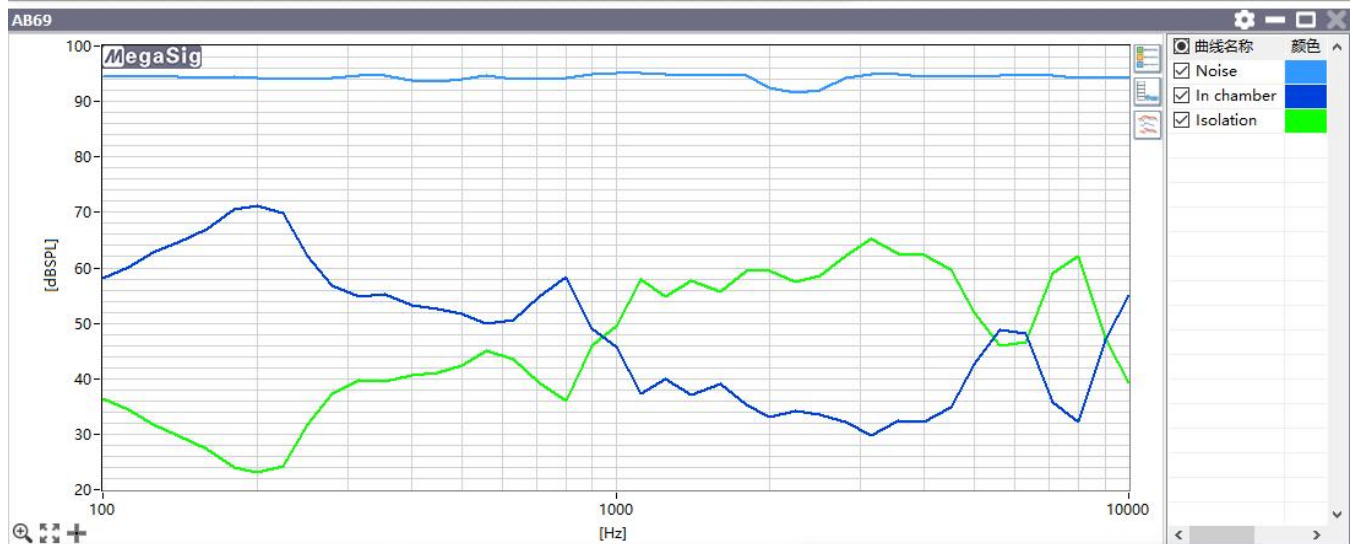


Size and Structure

Unit: mm

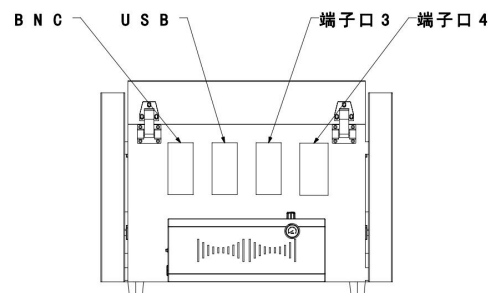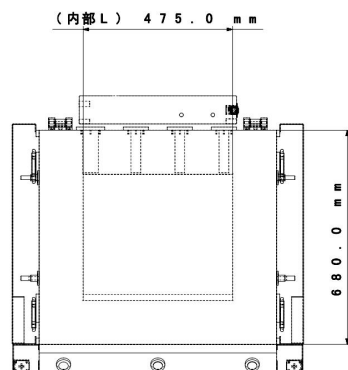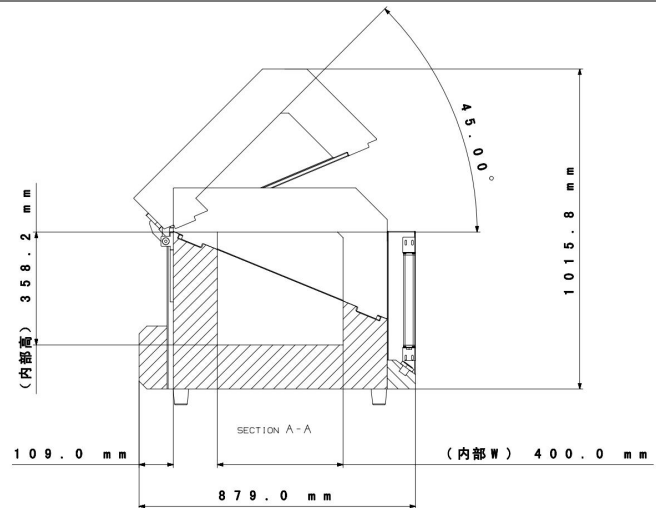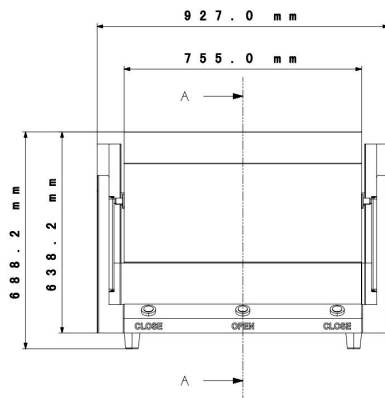

AB69 Box body
www.megasig.com

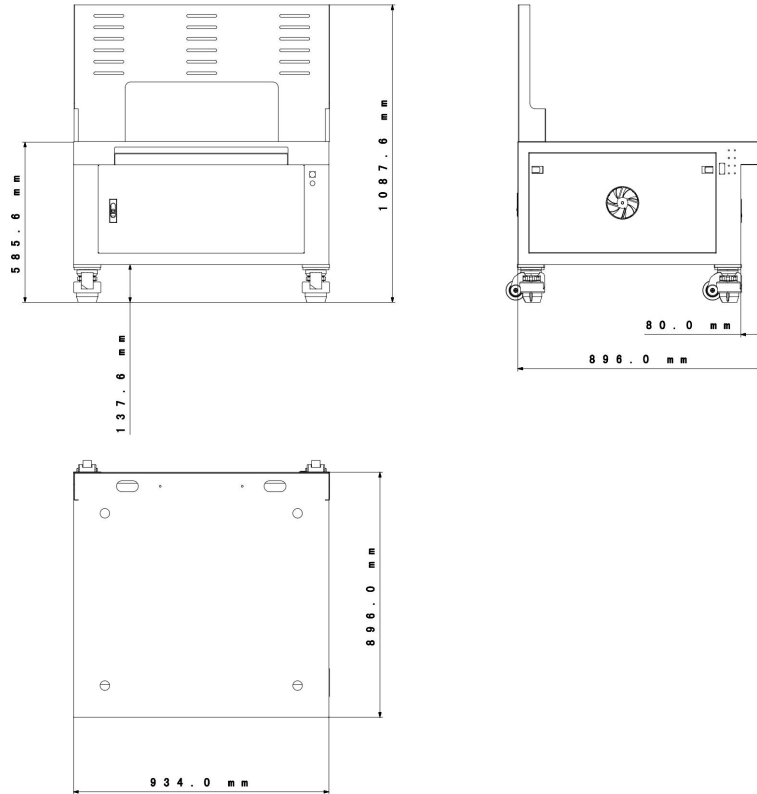

D69 Cabinet

Shielding performance test



RF isolation test configuration

Testing equipment:

- NI PXIe-5644R
- 2.4G Omnidirectional antenna

testing procedure


- Connect the device and connect the transmitting antenna and receiving antenna to the NI device via RF cable Connect the input and output interfaces.
- Place the receiving antenna vertically in the designated position inside the shielding box using a fixator.
- Enclosed shielding box, set up NI instrument to output 2.441GHz, -10dBm signal, and measure the signal amplitude A of the transmitting antenna located at five positions in the figure.
- Based on the difference between the measured signal amplitude A and the output signal of -10dBm, the screen is determined
The isolation degree of the shielding box is $SE=A+10$.

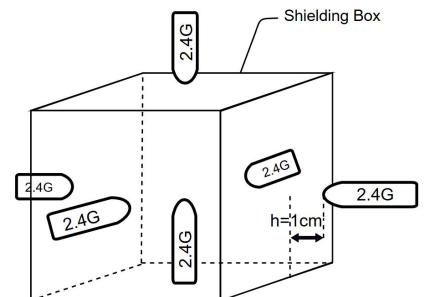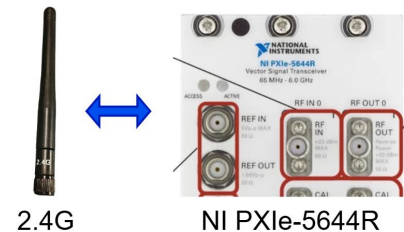

Audio isolation test configuration


Test equipment:

- Audio analyzer: PM6181
- Sound source: SB07
- Microphone: M663+A802

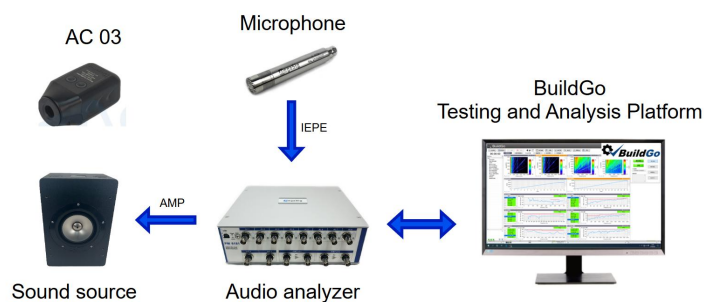

Testing procedure

- The AC 03 sound level calibrator performs software coefficient calibration on the microphone.
- Without placing a shielding box, place the microphone at the center of the test, arrange the test sound source around the microphone, and connect the corresponding equipment.
- Open the test sound source, and the audio analyzer outputs a noise signal with a continuous spectrum, while obtaining the first noise sample data collected by the microphone.
- Place the shielding box in the center position, place the microphone in the set position inside the shielding box, and seal the shielding box. Output the same noise signal and obtain the second noise sample data collected by the microphone in the shielding box.
- Based on the difference between the first noise sample data and the second noise sample data, obtain the frequency dependent curve of the sound insulation of the shielding box.

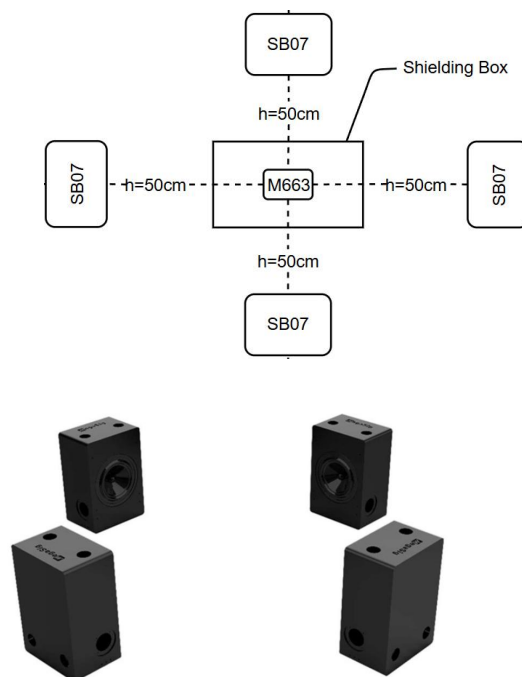

If the product specifications are updated, no further notice will be given.



www.megasig.com

Shenzhen MegaSig Measurement and Control Technology Co., Ltd

Phone: 0755-8950.8393

Fax: 0755-8950.8392

Sale email: sale@megasis.com

Technical support: support@megasis.com

Address: China, Shenzhen, Guangming District, Hongxing Chuangzhi Plaza,
Building 1, Unit 2, Room 1002