

2-socket G12 jack to BNC plug standard cable 201A

Version: 2.1_20260605_EN



2-socket G12 jack to BNC plug standard cable, specially designed for audio systems, with a differential impedance of 100 ohms. The cable features a copper wire core for stable transmission, with an outer diameter of 6.8mm and made of black TPE material. It is highly flexible and durable.

This cable is widely used in audio testing systems, connecting amplifiers, speakers, sensors, and other devices.

Product Characteristics

- Complies with UL1581/2000 engineering design reference standard & UL758/2000 testing standard.
- Complies with ROHS & REACH environmental protection testing standards.
- The cable has a high degree of flexibility.


Product Technical Parameters

Cable Length	1.5m、 3.0m、 6.0m、 9.0m、 12.0m、 custom cable length
Temperature Range	-15℃~60℃
Impedance	100Ω
Connector Type	2-socket G12 Jack to BNC Plug
Strain Relief	PVC molded boot
Cable Specifications	Two-conductor cable, Inner core of copper wire + LDPE insulation + black PTFE tape + braided shielding Cable jacket: Black TPE-OD:6.8mm±0.1mm

Ordering Information

PN	Model	Description	
730011-015	201A015	2-socket G12 jack to BNC plug,cable jacket diameter 6.8mm,black TPE cable,temperature resistance 60℃	Length 1.5m
730011-030	201A030		Length 3.0m
730011-060	201A060		Length 6.0m
730011-090	201A090		Length 9.0m
730011-120	201A120		Length 12.0m
730011-000	201A		Customizable length

External Dimensions

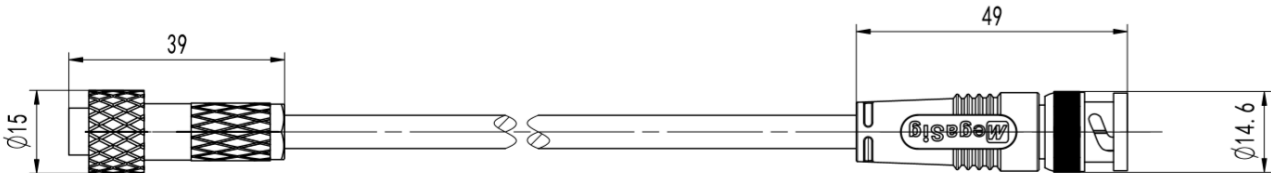

2-socket G12 Jack

BNC Plug

Unit Length:mm

MegaSig reserves the right to change specifications and accessories without notice.



www.megasig.com

MegaSig Measurement & Control Technology Co.,Ltd

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: sale@megasig.com

Technical support email: support@megasig.com

Address: 4th & 5th floors, Unit 2, Building 1, Guangming Digital Smart Manufacturing Industrial Park, Jinmo Road, Guangming District, Shenzhen, China