

4-socket M8 plug to 4-socket M8 plug standard cable 402A

Version: 2.1_20260605_EN



4-socket M8 plug to 4-socket M8 plug standard cable, specially designed for audio systems. The cable features a tin-plated copper wire core for stable transmission, with an outer diameter of 4.5mm and made of black PVC material. It is highly flexible and durable.

This cable is widely used in audio testing systems, connecting amplifiers, speakers, sensors, and other devices.

Product Characteristics

- Complies with UL1581/2000 engineering design reference standard & UL758/2000 testing standard.
- Complies with ROHS & REACH environmental protection testing standards.
- The cable has a high degree of flexibility.


Product Technical Parameters

Cable Length	1.5m、 3m、 6m、 9m、 12m, custom cable length
Temperature Range	-20℃~80℃
Connector Type	4-socket M8 Plug to 4-socket M8 Plug
Strain Relief	PVC molded boot
Cable Specifications	Four-conductor cable, Inner core of tin-plated copper wire + PVC insulation + braided shielding Cable jacket： Black PVC-OD:4.5mm±0.1mm

Ordering Information

PN	Model	Description	
730016-015	402A015	4-socket M8 plug to 4-socket M8 plug ,cable jacket diameter 4.5mm,black PVC cable,temperature resistance 80℃	length 1.5m
730016-030	402A030		length 3.0m
730016-060	402A060		length 6.0m
730016-090	402A090		length 9.0m
730016-120	402A120		length 12.0m
730016-000	402A		Customizable length

External Dimensions

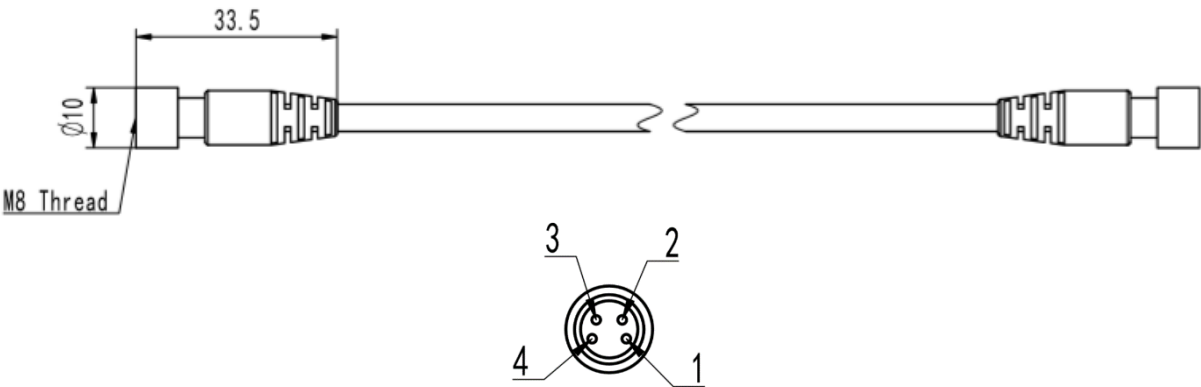

4-socket M8 Plug

Unit Length:mm

MegaSig reserves the right to change specifications and accessories without notice.



www.megasig.com

MegaSig Measurement & Control Technology Co.,Ltd

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: sale@megasig.com

Technical support email: support@megasig.com

Address: 4th & 5th floors, Unit 2, Building 1, Guangming Digital Smart
Manufacturing Industrial Park, Jinmo Road, Guangming District,
Shenzhen, China