



Three-axis acceleration sensor special cable, low noise and anti-interference.

Distribution box internal shielding processing, reliable performance. Cable sheath material imported TPE, high flexibility cable, very thin cable.

Application scenario: three-axis acceleration sensor

## Product characteristics

- Complies with IPC/WHMA-A-620 cable and harness assembly requirements and acceptance standards
- 100% test, product without short circuit and open condition


## Specification

Cable length Optional	Optional length: 3m,6m,10m, support customized length
Connection mode	Snap connection
Temperature range	0°C~80°C
Number of plugs	≥2000
连接器型号	BNC RF-1.5, C4 connector: 1/4-28 UNF
屏蔽壳	Nickel plated brass
包胶成型	Injection molding Black PVC
单芯线缆规格	7/0.1 Stranded silver-plated copper conductor + wrap + shield, inner core Teflon color, OD:1.1, cable insulation material is matte black TPE, OD: 2.0.
四芯线缆规格	C4 cable, 4×7/0.08 stranded tin-plated copper conductor +FEP insulation + cabling wrapped semi-conductive F4 film + shielding, inner core insulation color can be divided into red, green, blue, black, cable OD: 1.1, cable insulation material is matte black TPE, OD: 2.0.

## Ordering information:

Optional length	
720003-01	1/4-28UNF-BNC-3, 1/4-28UNF to BNC, 3米
720003-02	1/4-28UNF-BNC-6, 1/4-28UNF to BNC, 6米
720003-03	1/4-28UNF-BNC-10, 1/4-28UNF to BNC, 10米
720003-04	1/4-28UNF-BNC-X, 1/4-28UNF to BNC, Custom length


## Apparent dimension:

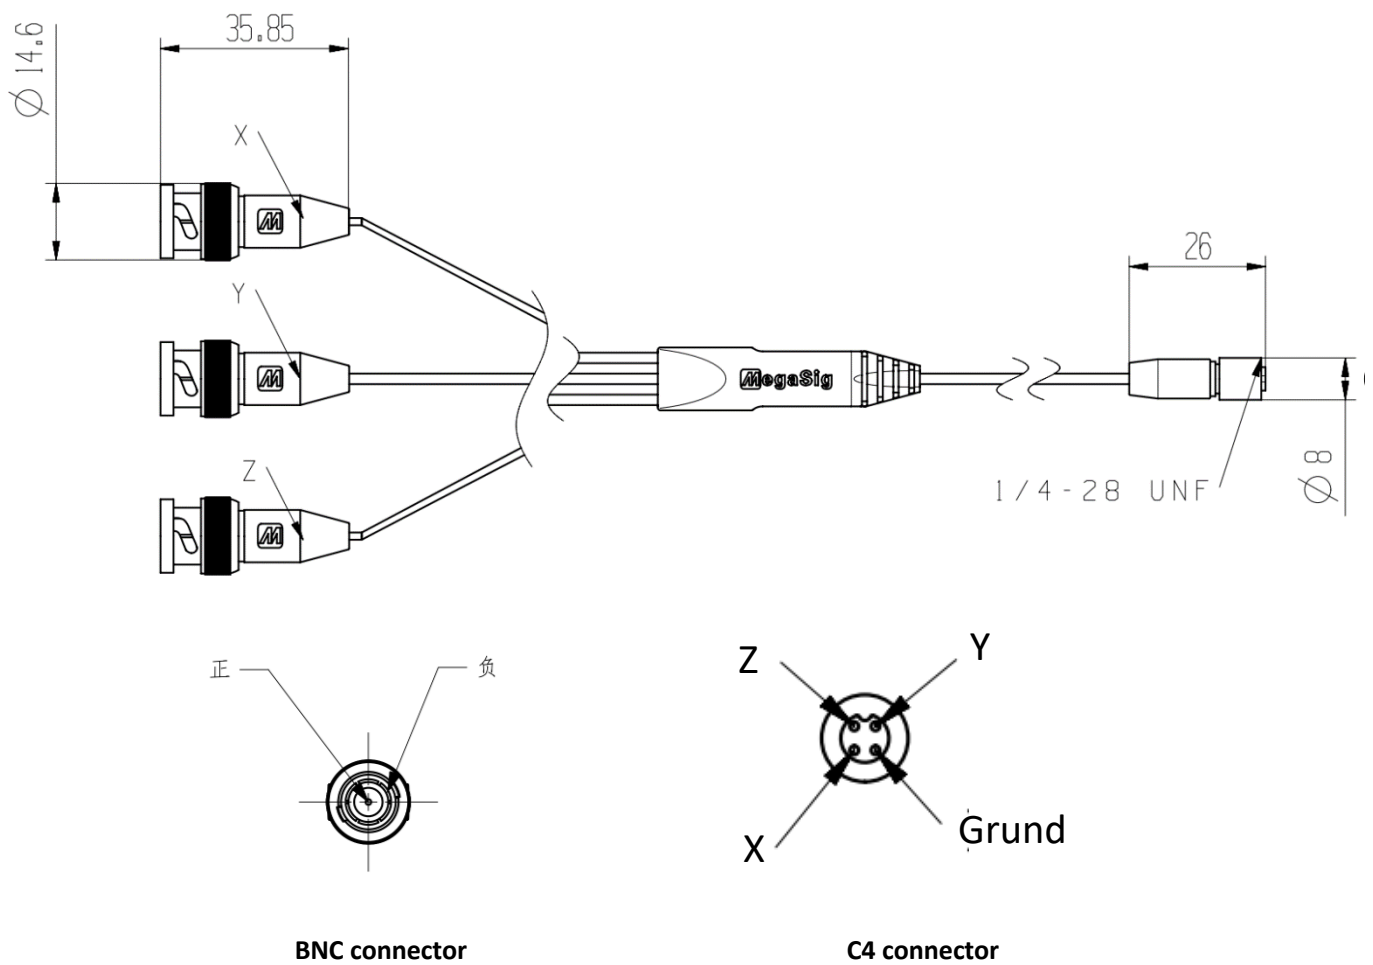

## Internal cable structure:

---

### Coaxial cable:

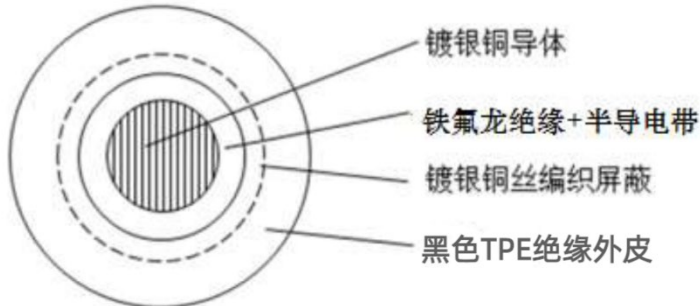

### C4 cable:



*MegaSig reserves the right to change specifications and accessories without notice.*



[www.megasig.com](http://www.megasig.com)

**MegaSig Measurement & Control Technology Co.,Ltd**

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: [sale@megasig.com](mailto:sale@megasig.com)

Technical support email: [support@megasig.com](mailto:support@megasig.com)

Address: Room 1002, Unit 2, Building 1, Hongxing Chuangzhi Plaza,  
Guangming District, Shenzhen, China