

IM-ABC1005 绝缘磁座

产品规格书

IM-ABC1005 Insulated Magnetic Base

Product Specification

产品规格书-中文.....	1
Product introduction-EN.....	3

从此文件发布日期起，在此发表的是当前或者拟定的信息。由于我们会不断对产品进行改进和增加特征此出版物中的信息如有变动恕不另行通知。

From the date of this document's release, the information published here is current or proposed. As we will continuously improve and add features to our products, the information in this publication is subject to change without further notice.

产品简介

IM-ABC1005绝缘磁座



IM-ABC1005 绝缘磁座，加速度传感器固定配件，采用高绝缘性能材质和强磁钕铁硼，实现传感器与金属安装面的绝缘隔离。

适用场景：广泛用于加速度传感器等设备。


功能特点

- 符合ROHS&REACH环保检测标准
- 产品无需钻孔、粘胶，直接吸附于设备金属表面
- 体型小，轻量化设计

规格参数

整体参数	
外形尺寸（直径）	10mm
厚度	5mm
重量	≤3.2g
螺纹规格	M5外螺纹
材质	不锈钢
绝缘材质	聚醚醚酮

外观尺寸

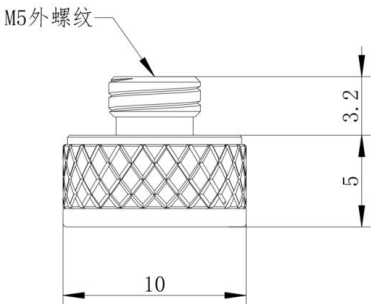

单位长度：mm

订购信息

PN号	型号	图片	说明
900014-15	IM-ABC1005		圆形磁座，直径10mm，厚度5mm，M5外螺纹，重量约3.2g，绝缘
900014-11	IM-AAC1005		圆形磁座，直径10mm，厚度5mm，M5内螺纹，重量约2.3g，绝缘

在无深圳市美格信测控技术有限公司优先书面授权书前提下，此出版物任何一个部分不可通过任何形式进行复制、修改和翻译。对于非法复制、修改和翻译商业行为，将根据国家知识产权相关法律追求其法律责任。

Product introduction

IM-ABC1005 insulated magnetic seat



IM-AAC1005 insulated magnetic seat, fixed accessory for acceleration sensor, using high insulation performance material and strong magnetic neodymium iron boron to achieve insulation isolation between the sensor and the metal mounting surface.

Applicable scenarios: Widely used in devices such as acceleration sensors.

Features


- Complies with ROHS & REACH environmental protection testing standards
- Requires no drilling or adhesive; directly adheres to metallic surfaces of equipment via magnetic attraction
- Compact size and lightweight design

Specification parameters

Parameters	
Dimensions (diameter)	10mm
Thickness	5mm
Weight	≤3.2g
Thread size	M5 male thread
Material	Stainless steel
Insulation material	PEEK

Dimensions

unit:mm

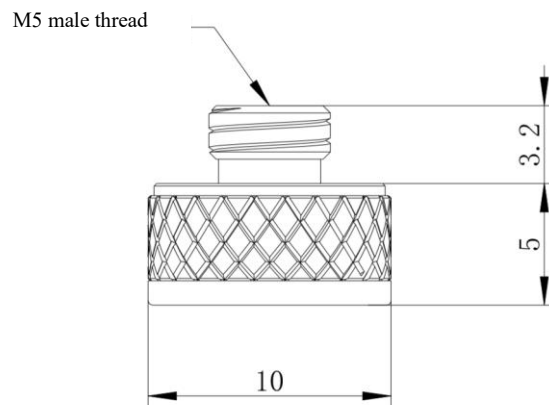

Ordering Information

PN	Model	Picture	Description
900014-15	IM-ABC1005		Circular magnetic seat, diameter 10mm, thickness 5mm, M5 male thread , weight approximately 2.3g, insulated
900014-11	IM-AAC1005		Circular magnetic seat, diameter 10mm, thickness 5mm, M5 female thread, weight approximately 2.3g, insulated

Without the prior written authorization of Shenzhen MegaSig Measurement And Control Technology CO LTD., no part of this publication may be reproduced, modified or translated in any form. Legal liability will be pursued in accordance with the national laws on intellectual property rights for commercial activities involving illegal reproduction, modification or translation.