

SK 506 振动台

产品规格书

SK 506 Shaker

Product Specification

产品规格书-中文	1
Product introduction-EN	4

从此文件发布日期起，在此发表的是当前或者拟定的信息。由于我们会不断对产品进行改进和增加特征此出版物中的信息如有变动恕不另行通知。

From the date of this document's release, the information published here is current or proposed. As we will continuously improve and add features to our products, the information in this publication is subject to change without further notice.

产品简介

SK 506 振动台




SK 506 是一款设计用于小型振动台使用的振动台，适用适用于加速度计校准、小物体振动实验、机械阻抗测量、实验模态分析。

规格参数


整体参数	
额定出力（峰值） 正弦/随机	50N
最大振幅	± 7.5 mm
最大加速度	35 g
最大输入电流	≤18Arms
频率范围	20Hz - 8kHz
一阶共振频率	<90Hz
动圈直流电阻	0.7Ω ± 0.1Ω
力常数(N/A)	3.1
横向振动	≤10%
可动部件质量	0.155kg
外形尺寸(mm)	Φ 138× 172
安装孔尺寸(mm)	152× 128 /4-Φ8
重量	8.1 Kg
输出方式	顶杆
连接方式	M5
弹性支撑刚度(N/mm)	3
强迫风冷	无
非线性	≤3%（对最大激振力）
工作温度	-30 °C - +70 °C

SK 506-不同负载下的加速度曲线以及推力曲线

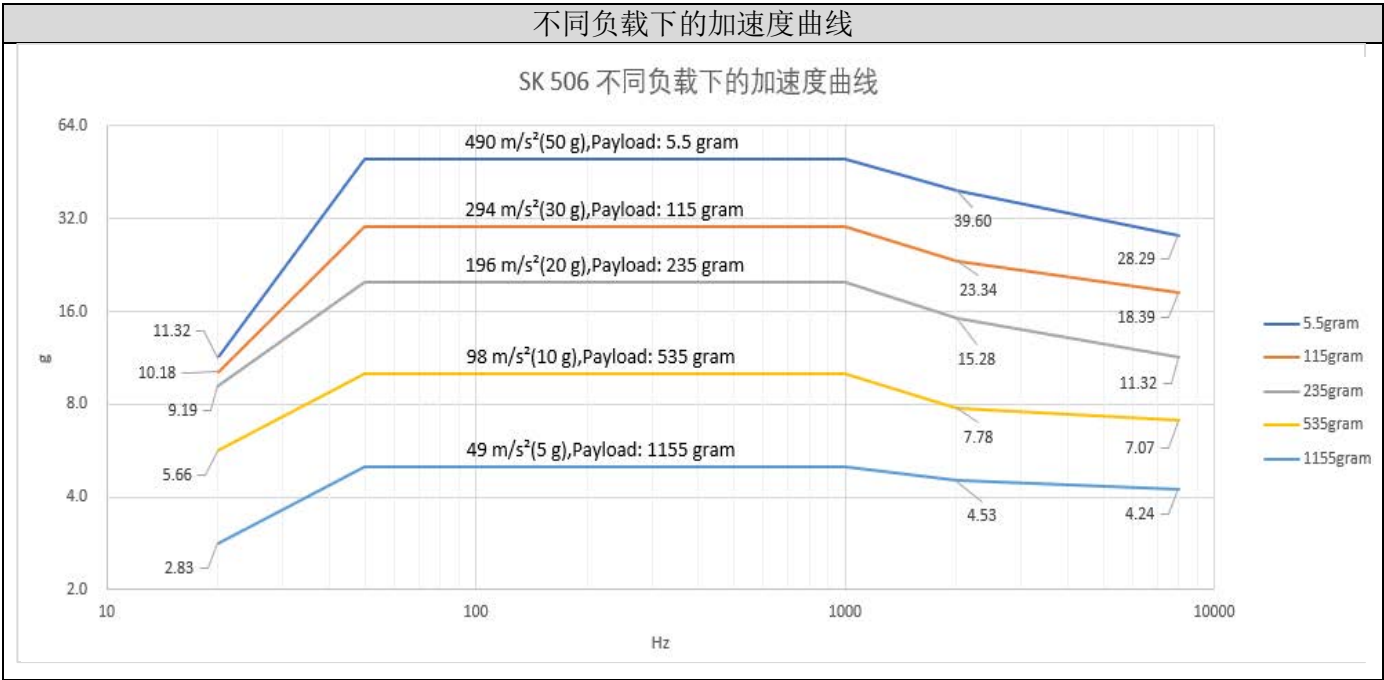

尺寸与结构

单位: mm

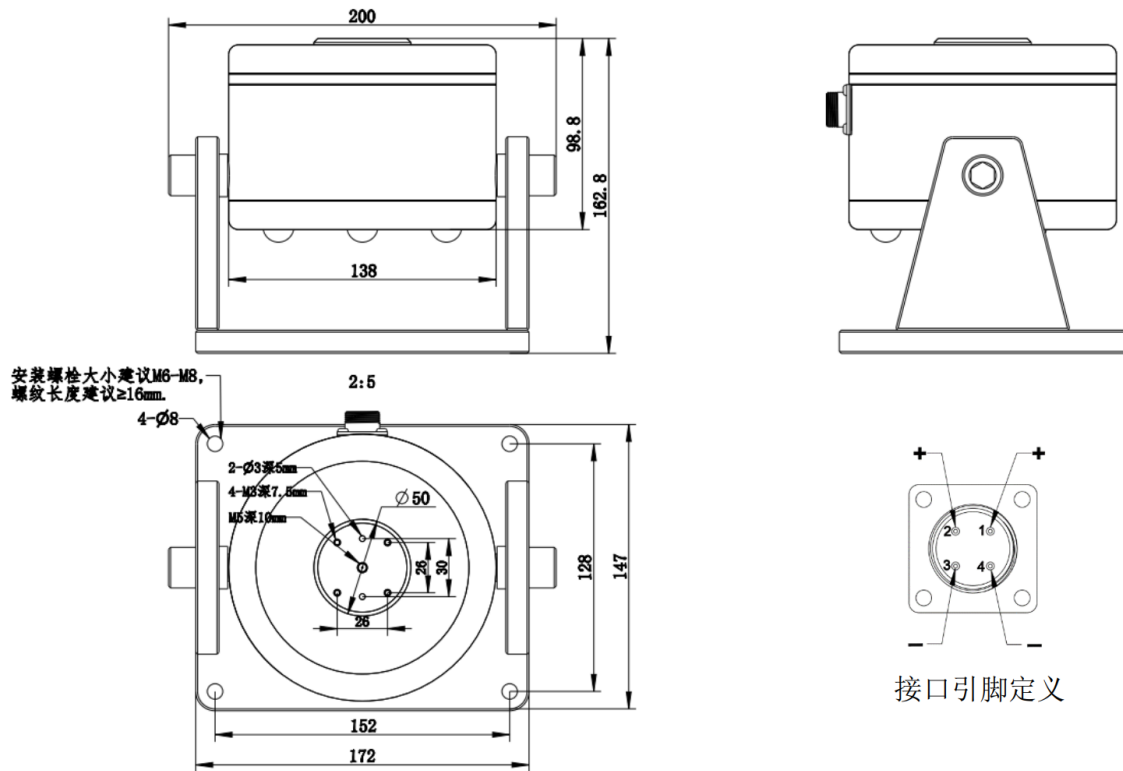

在无深圳市美格信测控技术有限公司优先书面授权书前提下，此出版物任何一个部分不可通过任何形式进行复制、修改和翻译。对于非法复制、修改和翻译商业行为，将根据国家知识产权相关法律追求其法律责任。

Product introduction

SK 506 Shaker




SK 506 is a vibration table designed for use with small shaker, suitable for Accelerometer calibration 、 Vibration testing of small objects、 Mechanical impedance measurements、 Experimental modal analysis.

Specification parameters


Parameters	
Rated force output (peak) sine/random	50N
Maximum amplitude	± 7.5 mm
Maximum acceleration	35 g
Maximum input current	≤ 18 Arms
Frequency range	20Hz - 8kHz
First-order resonant frequency	< 90 Hz
Voice coil direct current	$0.7\Omega \pm 0.1\Omega$
Force constant (N/A)	3.1
Lateral vibration	$\leq 3\%$
Moving mass	0.155kg
Dimension (mm)	$\Phi 138 \times 172$
Installation hole dimensions (mm)	$152 \times 128 / 4-\Phi 8$
Weight	8.1 Kg
Output method or output type	Piston rod
Connection method or connection type	M5
Elastic support stiffness or spring rate (N/mm)	3
Forced air cooling	Not
Nonlinearity	$\leq 3\%$ (Regarding maximum excitation force)
Working temperature	-30 °C - +70 °C

SK 506 Acceleration curves and thrust curves under different loads

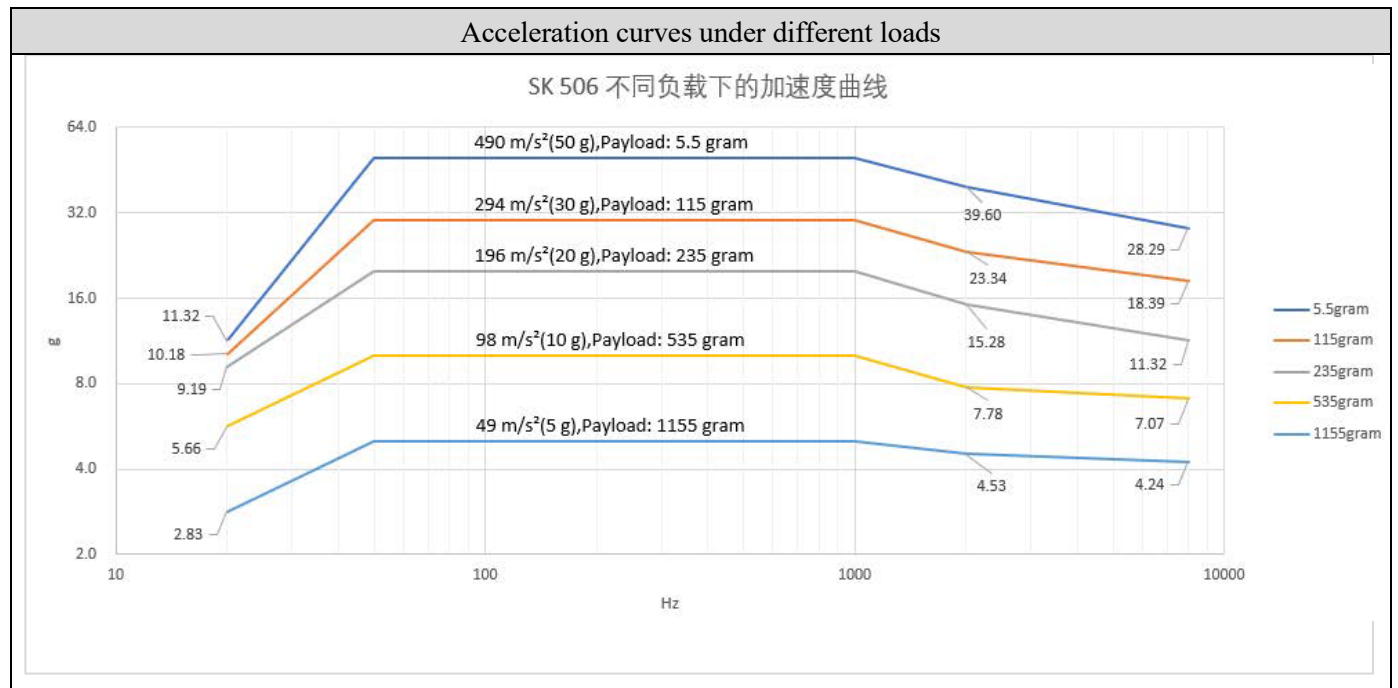

Size and Structure

Unit: mm

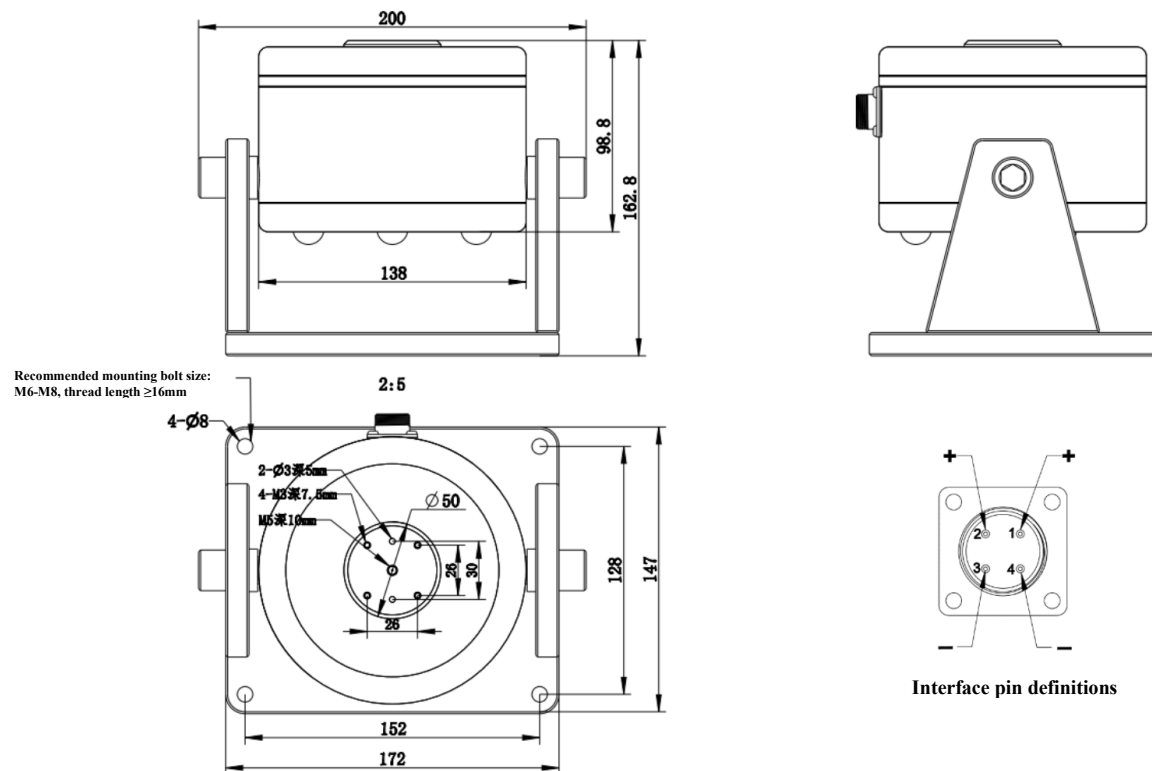

Without the prior written authorization of Shenzhen MegaSig Measurement & Control Technology Company Limited, no part of this publication may be reproduced, modified or translated in any form. Legal liability will be pursued in accordance with the national laws on intellectual property rights for commercial activities involving illegal reproduction, modification or translation.