

BNC plug to BNC plug general-purpose cable 101A

Version: 2.1_20260605_EN



BNC plug to BNC plug general-purpose cable, specially designed for audio systems, with a characteristic impedance of 50 ohms. The cable features a silver-plated copper wire core for stable transmission, with an outer diameter of 1.9mm and is made of white PFA material. It has a fine wire diameter and high wear resistance.

This cable is widely used in audio testing systems, connecting amplifiers, speakers, sensors, and other

Product Characteristics

- Complies with UL1581/2000 engineering design reference standard & UL758/2000 testing standard.
- Complies with ROHS & REACH environmental protection testing standards.
- The cable can withstand a maximum temperature of 200°C.


Product Technical Parameters

Cable Length	1.5m、3m、6m、9m、12m、 custom cable length
Temperature Range	-60℃~200℃
Impedance	50Ω
Connector Type	BNC Plug to BNC Plug
Strain Relief	PVC molded boot
Cable Specifications	Coaxial cable, Inner core of silver-plated copper wire + PTFE insulation + braided shielding Cable jacket： White PFA-OD:1.9mm±0.05mm

Ordering Information

PN	Model	Description
730001-015	101A015	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, length 1.5m
730043-030	101A030	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, length 3.0m
730043-060	101A060	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, length 6.0m
730043-090	101A090	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, length 9.0m
730043-120	101A120	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, length 12.0m
730043-000	101A	BNC Plug to BNC Plug,cable jacket diameter 1.9mm,white PFA cable,high temperature resistance 200°C, Customizable length.

External Dimensions

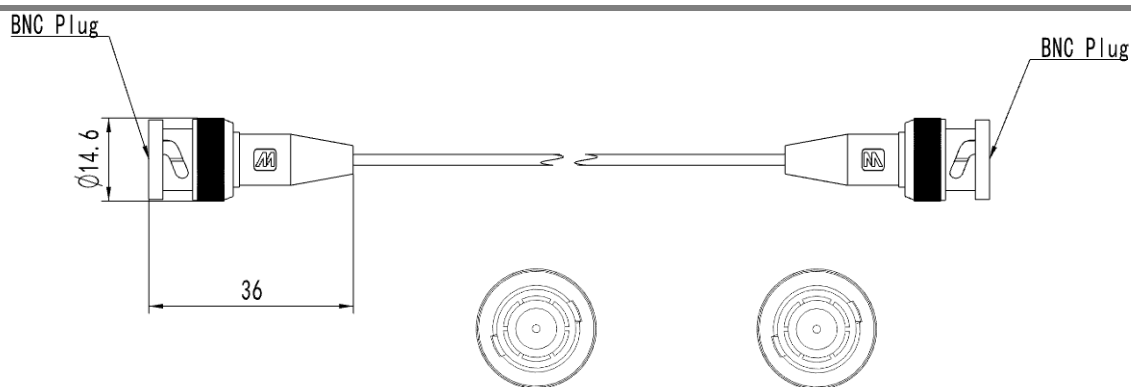

Megc



www.megasig.com

BNC Plug

BNC Plug

Unit Length:mm

MegaSig Measurement & Control Technology Co.,Ltd

Tel: 0755-8950.8393

Fax: 0755-8950.8392

Sales email: sale@megasig.com

Technical support email: support@megasig.com

Address: 4th & 5th floors, Unit 2, Building 1, Guangming Digital Smart Manufacturing Industrial Park, Jinmo Road, Guangming District, Shenzhen, China